



## HEADER SERIES MULTI-PIT PUMP



### 8 INCH OR 12 INCH

Available in 8" (7,000 GPM)  
or 12" (12,000 GPM)



### TRIPLE PORT OUTLET

Pumps more while  
using half the fuel



### UNIQUE AGITATOR

4" Discharge for unbeatable  
volume and pressure



### LOW MAINTENANCE

Tungsten Carbide Mechanical  
Seal for ultimate protection



### FULLY CUSTOMIZABLE

2 PT, 3 PT & trailer  
models available




### OPTIONAL

Wireless control of valve to  
switch from "agitate" to "fill"



### HIGH EFFICIENCY DESIGN

Reduces resistance and  
improves flow



### OPTIONAL


Optional hydraulic  
oil cooler






# HEADER SERIES MULTI-PIT PUMP

**FULLY CONTRACTED  
AT 9' DEPTH**

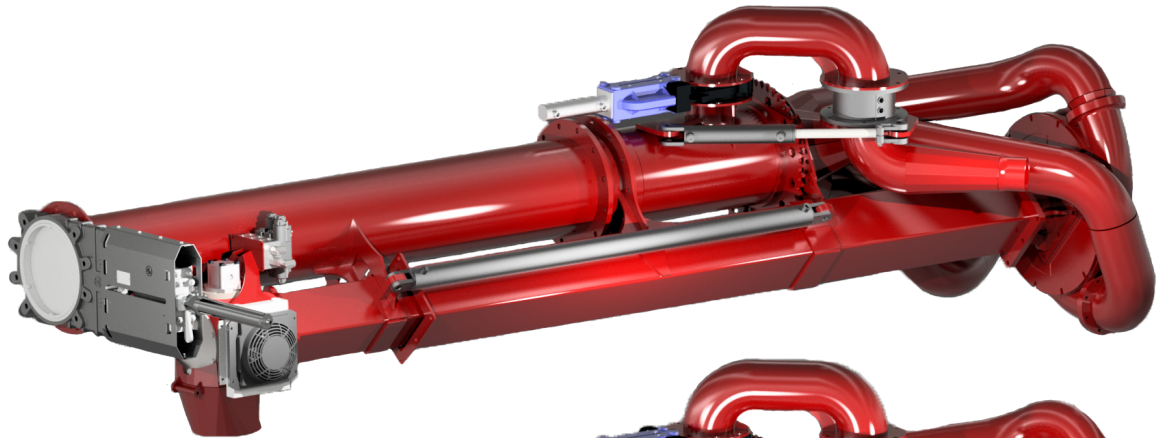

**FULLY EXTENDED  
AT 14' DEPTH**

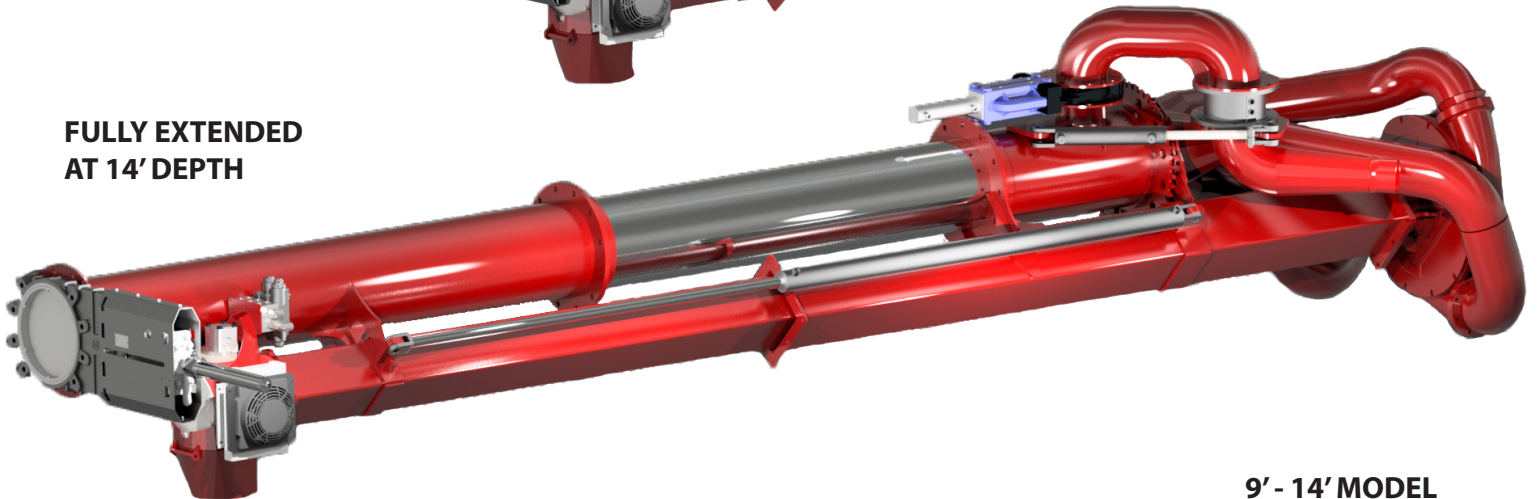

**9' - 14' MODEL**

## 8" TECHNICAL SPECIFICATIONS

**7,000 GPM @ 950 RPM 160 HP  
5,000 GPM @ 650 RPM 95 HP**

|                          |                |
|--------------------------|----------------|
| MAXIMUM HP REQUIRED      | 180 HP         |
| PIPE SIZE                | 8" ID          |
| AGITATOR ROTATION        | 320 °          |
| AGITATOR HEIGHT ROTATION | 320 °          |
| AGITATOR OUTLET DIAMETER | 5"             |
| OVERALL HOUSING WIDTH    | 32"            |
| DRIVE SHAFT DIAMETER     | 4" OD          |
| DRIVE SHAFT YOKE SIZE    | 55/80 SERIES   |
| SEALING SYSTEM           | MECHANICAL     |
| LUBRICATION STYLE        | OIL BATH       |
| HYDRAULIC CONTROL        | STANDARD       |
| MAIN FRAME               | 8" X 8" X 1/4" |
| WEAR MATERIALS           | WHITE IRON     |
| IMPELLER DIAMETER        | 20.5"          |
| IMPELLER STYLE           | 4 BLADE        |
| WIRELESS CONTROL         | OPTIONAL       |

## 12" TECHNICAL SPECIFICATIONS

**12,000 GPM @ 980 RPM 285 HP  
9,500 GPM @ 780 RPM 150 HP**

|                          |                |
|--------------------------|----------------|
| MAXIMUM HP REQUIRED      | 285 HP         |
| PIPE SIZE                | 12" ID         |
| AGITATOR ROTATION        | 170 °          |
| AGITATOR HEIGHT          | 80 °           |
| AGITATOR OUTLET DIAMETER | 6"             |
| OVERALL HOUSING WIDTH    | 32"            |
| DRIVE SHAFT DIAMETER     | 4" OD          |
| DRIVE SHAFT YOKE SIZE    | 55/80 SERIES   |
| SEALING SYSTEM           | MECHANICAL     |
| LUBRICATION STYLE        | OIL BATH       |
| HYDRAULIC CONTROL        | STANDARD       |
| MAIN FRAME               | 8" X 8" X 1/4" |
| WEAR MATERIALS           | WHITE IRON     |
| IMPELLER DIAMETER        | 20.5"          |
| IMPELLER STYLE           | 4 BLADE        |
| WIRELESS CONTROL         | OPTIONAL       |